

5151 Plug-In Heat Detector



5151

Models Available

5151
Plug-In Heat Detector

Description

5151 Plug-in HEAT Detectors offer superb performance and Reliability in a sleek, low-profile design.

The 5151 thermal detector meets the needs for Applications where rapid response is vital and rapid temperature increases would only be caused by a fire Emergency. The detector initiates an alarm in response to both rapid Rate-of-rise conditions (increases in excess of 15 °F per minute) and fixed heat (135 °F). This enables the heat Detector to communicate an alarm to the central control panel prior to reaching its fixed set point for high rates of Rise, providing a timely response to both rapid and slow temperature increases.

A full line of accessories are available for this product.

Features

- Low standby current
- Compatible with 400 Series product
- Two visible LEDs “blink” in standby and provide a 360 ° field viewing angle
- Detector head plugs easily into base
- Built-in test switch
- Wide variety of mounting bases with built-in shorting spring



Agency Listing



Specifications

Height:	50 mm installed in B401 Base
Diameter:	102 mm installed in B401 Base
Weight:	2.8 oz. (80 g)
Operating Temperature Range:	0 °C to 38 °C (32 °F to 100 °F)
Operating Humidity Range:	10% to 93% Relative Humidity, non-condensing
Operating Voltage:	8.5 to 35VDC
Standby Current:	80µA @ 24VDC
Alarm Current:	10mA Min. 130mA Max. (Must be limited by control panel)
Latching Alarm:	Reset by momentary power interruption.
Sensitivity:	57 °C (135 °F) Fixed or 15 °F /min rate-of-rise

Appearance

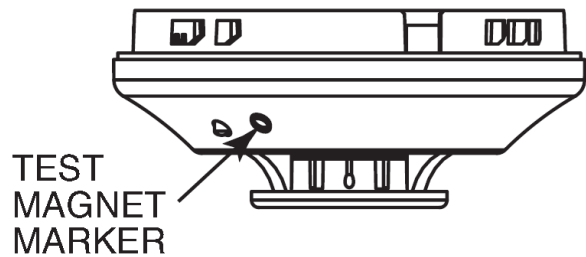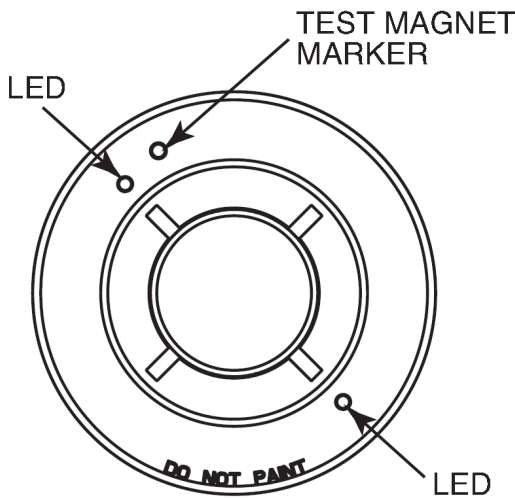

Ordering Information

Ordering Model	Description	UL	FM	UOM
5151	Plug-In Heat Detector	Yes	Yes	EA
B401	Plug-In Detector Base, 4"	Yes	Yes	EA
B401B	Plug-In Detector Base, 6.2"	Yes	NA	EA
B401-WP	Water proof Plug-In Detector Base, 4"	NA	NA	EA



System Sensor Headquarters
3825 Ohio Avenue
St. Charles, IL 60174
Ph: 630-377-6580
Fx: 630-377-6495
Free Phone: 800-736-7672
Web: www.systemsensor.com

System Sensor China
28 Tuan Jie South Road,
Hi-Tech Development Zone
Xi'an, 710075, China
Ph: +86 29 85387800
Fx: +86 29 88895930
Web: www.systemsensor.com.cn

System Sensor Canada
Ph: 905-812-0767
Fx: 905-812-0771

System Sensor Europe
Ph: 44 (0) 1527 406700
Fx: 44 (0) 1527 406699

System Sensor Italy
Ph: 39 040 949 0111
Fx: 39 040 382 137

System Sensor Mexico
Ph: 54 11 4324-1909
Fx: 54 11 4324-5999

System Sensor Far East Ltd
Ph: 852 21919003
Fx: 852 27366580

System Sensor Singapore
Ph: 65 6273 2230

System Sensor India
Ph: 91 124 2371770-270
Fx: 91 124 2373118

System Sensor Australia
Ph: 61-3-5428 1142
Fx: 61-3-5428 1172